

Safe Mounting with Greater Sensing Distance and Easy Wiring with No Polarity

- Ensures a sensing distance approximately 1.5 to 2 times larger than that of any conventional OMRON Sensor.
- Offers greater design flexibility and ease for the detection of large-sized or non-ferrous sensing objects.
- Problems such as the collision of workpieces are eliminated.
- The E2EM has no polarity, thus eliminating problems associated with reversed wiring.

<READ AND UNDERSTAND THIS CATALOG>



Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.



Ph: 03 5278 8222 Fax: 03 5278 9761
65 Douro Street, North Geelong VIC 3215
www.factorycontrols.com.au


Ordering Information

DC 2-wire/Pre-wired Models


Type	Size	Sensing distance	Model	
			NO	NC
 Shielded	M12	4 mm	E2EM-X4X1 (see note)	E2EM-X4X2
	M18	8 mm	E2EM-X8X1 (see note)	E2EM-X8X2
	M30	15 mm	E2EM-X15X1 (see note)	E2EM-X15X2
 Unshielded	M18	16 mm	E2EM-X16MX1	E2EM-X16MX2
	M30	30 mm	E2EM-X30MX1	E2EM-X30MX2

Note: Connector relay models (cable length of 300 mm) are available.

DC 3-wire/Pre-wired Models

Type	Size	Sensing distance	Model			
			NPN NO	PNP NO	NPN NC	PNP NC
 Shielded	M8	2 mm	E2EM-X2C1	E2EM-X2B1	E2EM-X2C2	E2EM-X2B2
	M12	4 mm	E2EM-X4C1	E2EM-X4B1	E2EM-X4C2	E2EM-X4B2
	M18	8 mm	E2EM-X8C1	E2EM-X8B1	E2EM-X8C2	E2EM-X8B2
	M30	15 mm	E2EM-X15C1	E2EM-X15B1	E2EM-X15C2	E2EM-X15B2

DC 3-wire/Connector Models

Type	Size	Sensing distance	Output configuration	Model
 Shielded	M8	2 mm	NPN NO	E2EM-X2C1-M1
	M12	4 mm		E2EM-X4C1-M1
	M18	8 mm		E2EM-X8C1-M1
	M30	15 mm		E2EM-X15C1-M1
	M8	2 mm	PNP NO	E2EM-X2B1-M1
	M12	4 mm		E2EM-X4B1-M1
	M18	8 mm		E2EM-X8B1-M1
	M30	15 mm		E2EM-X15B1-M1

Note: Models with output configuration of NPN NC and PNP NC are also available.

Specifications

■ Ratings/Characteristics

E2EM-X□X□ DC 2-wire Models

Item		E2EM-X4X□	E2EM-X8X□	E2EM-X16MX□	E2EM-X15X□	E2EM-X30MX□
Size		M12	M18		M30	
Type		Shielded	Shielded	Unshielded	Shielded	Unshielded
Sensing distance		4 mm ±10%	8 mm ±10%	16 mm ±10%	15 mm ±10%	30 mm ±10%
Setting distance (see note 1)		0 to 3.2 mm	0 to 6.4 mm	0 to 12.8 mm	0 to 12 mm	0 to 24 mm
Differential travel		15% max. of sensing distance				
Sensing object		Ferrous metal (refer to <i>Engineering Data</i> for non-ferrous metal on page 4)				
Standard object (mild steel)		12 x 12 x 1 mm	18 x 18 x 1 mm	45 x 45 x 1 mm	30 x 30 x 1 mm	70 x 70 x 1 mm
Response frequency (see note 2)		1 kHz	0.5 kHz	0.4 kHz	0.25 kHz	0.1 kHz
Power supply voltage (operating voltage range)		12 to 24 VDC, ripple (p-p): 10% max., (10 to 30 VDC)				
Leakage current		0.8 mA max.				
Control output	Switching capacity	5 to 100 mA				
	Residual voltage (see note 3)	5 V max. (under load current of 100 mA with cable length of 2 m)				
Indicator		X1 models: X2 models:	Operation indicator (red LED), operation set indicator (green LED) Operation indicator (red LED)			
Operation (with sensing object approaching)		X1 models: X2 models:	NO NC For details, refer to the timing charts on page 5.			
Circuit protection		Surge absorber, load short-circuit protection				
Ambient temperature		Operating: -25°C to 70°C (with no icing or condensation) Storage: -40°C to 85°C (with no icing or condensation)				
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)				
Temperature influence		±15% max. of sensing distance at 23°C in temperature range of -25°C to 70°C				
Voltage influence		±1% max. of sensing distance in rated voltage range ±15%				
Insulation resistance		50 MΩ min. (at 500 VDC) between current carry parts and case				
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current carry parts and case				
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions				
Shock resistance		Destruction: 1,000 m/s ² for 10 times each in X, Y, and Z directions				
Degree of protection		IEC60529 IP67				
Connection method		Pre-wired models (standard length: 2 m)				
Weight (packaged)		Approx. 60 g	Approx. 130 g	Approx. 150 g	Approx. 180 g	Approx. 210 g
Material	Case	Brass				
	Sensing surface	PBT				
Accessories		Instruction manual				

- Note:**
1. Use within a range where the green indicator is lit. (Excluding the X2 models.)
 2. The response frequency of the DC switch section is an average value. Use standard sensing objects, provide a distance of twice the standard sensing object distance between sensing objects, and provide a setting distance of half the sensing distance as measurement conditions.
 3. Since the residual voltage is 5 V, confirm interface conditions with devices to be connected. Refer to page 11.

E2EM-X□B□/C□ DC 3-wire Models

Item		E2EM-X2B□/C□ (-M1)	E2EM-X4B□/C□ (-M1)	E2EM-X8B□/C□ (-M1)	E2EM-X15B□/C□ (-M1)
Size		M8	M12	M18	M30
Type		Shielded			
Sensing distance		2 mm ±10%	4 mm ±10%	8 mm ±10%	15 mm ±10%
Setting distance		0 to 1.6 mm	0 to 3.2 mm	0 to 6.4 mm	0 to 12 mm
Differential travel		10% max. of sensing distance			
Sensing object		Ferrous metal (refer to <i>Engineering Data</i> for non-ferrous metal on page 4)			
Standard object (mild steel)		8 x 8 x 1 mm	12 x 12 x 1 mm	18 x 18 x 1 mm	30 x 30 x 1 mm
Response frequency (see note 2)		1.5 kHz	0.5 kHz	0.3 kHz	0.1 kHz
Supply voltage (operating voltage range) (see note 1)		12 to 24 VDC, ripple (p-p): 10% max., (10 to 40 VDC)			
Leakage current		13 mA max.			
Control output	Switching capacity (see note 1)	200 mA max.			
	Residual voltage	2 V max. (under load current of 200 mA with cable length of 2 m)			
Indicator		Operation indicator (Yellow LED)			
Operation (with sensing object approaching)		B1, C1 models: NO B2, C2 models: NC For details, refer to the timing charts on page 5.			
Circuit protection		Reverse connection protection, surge absorber, load short-circuit protection			
Ambient temperature (see note 2)		Operating/Storage: -40°C to 85°C (with no icing or condensation)			Operating: -25°C to 70°C Storage: -40°C to 85°C (with no icing or condensation)
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)			
Temperature influence		±15% max. of sensing distance at 23°C within temperature range of -40°C to 85°C ±10% max. of sensing distance at 23°C within temperature range of -25°C to 70°C			±15% max. of sensing distance at 23°C within temperature range of -25°C to 70°C
Voltage influence		±1% max. of sensing distance in rated voltage range ±15%			
Insulation resistance		50 MΩ min. (at 500 VDC) between current carry parts and case			
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current carry parts and case			
Vibration resistance		Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions			
Shock resistance		Destruction: 500 m/s ² for 10 times each in X, Y, and Z directions	Destruction: 1,000 m/s ² for 10 times each in X, Y, and Z directions		
Degree of protection		IEC60529 IP67			
Connection method		Pre-wired models (standard length: 2 m) Connector models ("M1" models)			
Weight (packaged)	Pre-wired	Approx. 55 g	Approx. 65 g	Approx. 140 g	Approx. 190 g
	Connector	Approx. 10 g	Approx. 20 g	Approx. 40 g	Approx. 90 g
Material	Case	Stainless steel (SUS303)	Brass		
	Sensing surface	PBT			
Accessories		Instruction manual			


- Note:**
- When using the M8 models within the temperature range from 70°C to 85°C, the voltage range must be from 10 to 30 VDC and control output (switching capacity) must be 100 mA max.
 - The response frequency of the DC switch section is an average value. Use standard sensing objects, provide a distance of twice the standard sensing object distance between sensing objects, and provide a setting distance of half the sensing distance as measurement conditions.

Engineering Data

Operating Range (Typical)


Unshielded Models

E2EM-X□MX□

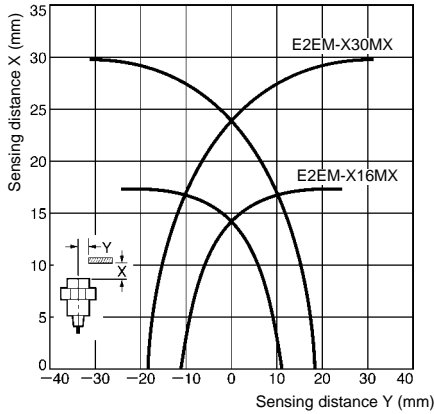


Shielded Models

E2EM-X□X□

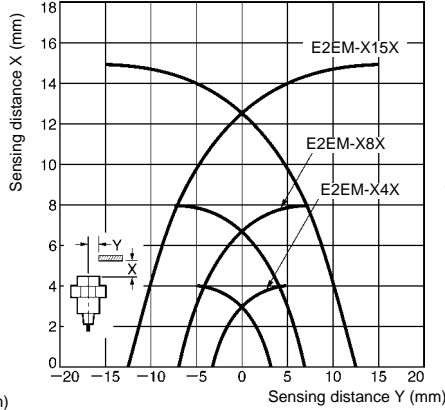


E2EM-XB□/C□

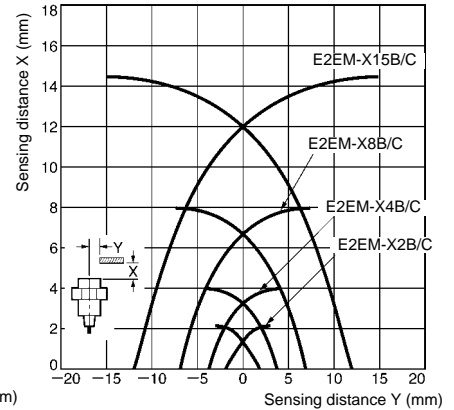


Influence of Sensing Object Size and Materials


E2EM-X2□□(-M1)

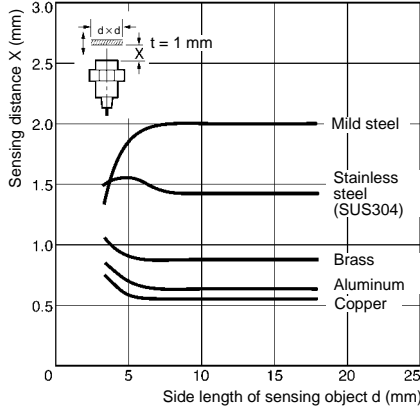


E2EM-X4□□(-M1)

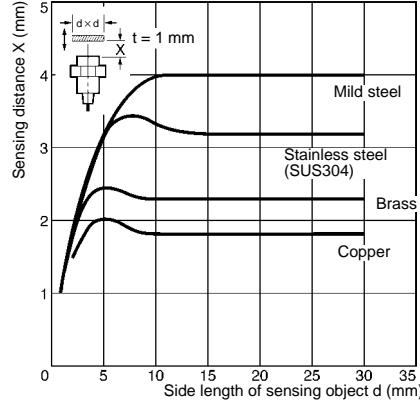


E2EM-X8□□(-M1)

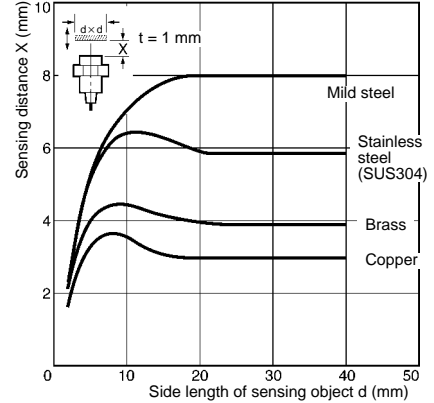


E2EM-X15□□(-M1)

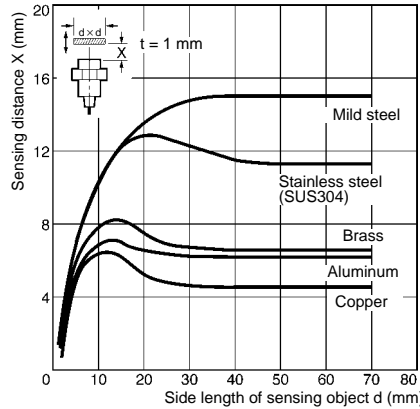

E2EM-X16MX□

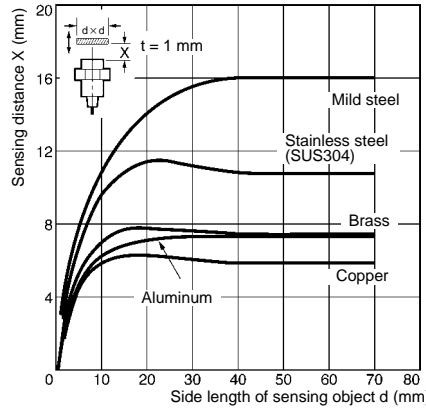


E2EM-X30MX□

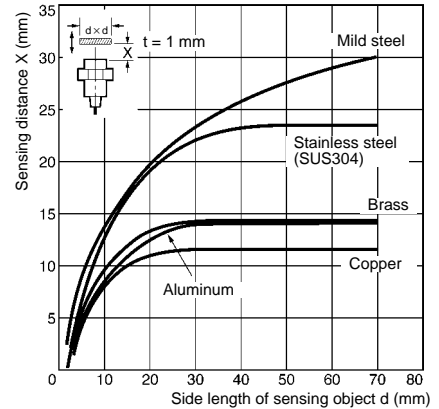

Residual Voltage Characteristics

E2EM-X□X□

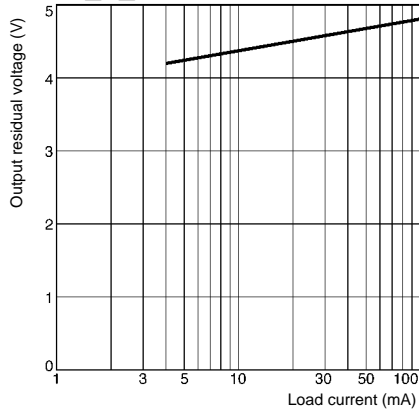

Operation

Output Circuits

E2EM-X□X□ DC 2-wire Models

Operation	Model	Timing chart	Output circuit
NO	E2EM-X4X1 E2EM-X8X1 E2EM-X15X1 E2EM-X16MX1 E2EM-X30MX1		
NC	E2EM-X4X2 E2EM-X8X2 E2EM-X15X2 E2EM-X16MX2 E2EM-X30MX2		<p>Note:</p> <ol style="list-style-type: none"> 1. The load can be connected to either +V or 0 V line. 2. Since there is no polarity, there is no need to pay attention to the brown or blue polarity.

E2EM-X□B□/C□(-M1) DC 3-wire Models

Operation	Output specifications	Model	Timing chart	Output circuit
NO	NPN open collector output	E2EM-X2C1 (-M1) E2EM-X4C1 (-M1) E2EM-X8C1 (-M1) E2EM-X15C1 (-M1)	Sensing object: Yes (High pulse), No (Low) Operation indicator (yellow): ON (High pulse), OFF (Low) Control output: ON (High pulse), OFF (Low)	<p>Note: Pin 4 is NO and pin 2 is NC.</p>
NC		E2EM-X2C2 E2EM-X4C2 E2EM-X8C2 E2EM-X15C2	Sensing object: Yes (High pulse), No (Low) Operation indicator (yellow): ON (High pulse), OFF (Low) Control output: ON (High pulse), OFF (Low)	
NO	PNP open collector output	E2EM-X2B1 (-M1) E2EM-X4B1 (-M1) E2EM-X8B1 (-M1) E2EM-X15B1 (-M1)	Sensing object: Yes (High pulse), No (Low) Operation indicator (yellow): ON (High pulse), OFF (Low) Control output: ON (High pulse), OFF (Low)	<p>Note: Pin 4 is NO and pin 2 is NC.</p>
NC		E2EM-X2B2 E2EM-X4B2 E2EM-X8B2 E2EM-X15B2	Sensing object: Yes (High pulse), No (Low) Operation indicator (yellow): ON (High pulse), OFF (Low) Control output: ON (High pulse), OFF (Low)	


E2EM-X□B□/C□-M1 DC 3-wire Models

Connector	Output configuration	Applicable models	Pin arrangement
M12	NO	E2EM-X□C1-M1	<p>Note: Terminal 2 is not used.</p>
		E2EM-X□B1-M1	<p>Note: Terminal 2 is not used.</p>
	NC	E2EM-X□C2-M1	<p>Note: Terminal 4 is not used.</p>
		E2EM-X□B2-M1	<p>Note: Terminal 4 is not used.</p>


Dimensions

Note: All units are in millimeters unless otherwise indicated.

Pre-wired Models (Shielded)




Mounting Hole Dimensions



Outer diameter	M8	M12	M18	M30
F (mm)	8.5 dia. +0.5/0	12.5 dia. +0.5/0	18.5 dia. +0.5/0	30.5 dia. +0.5/0


E2EM-X2B□/C□

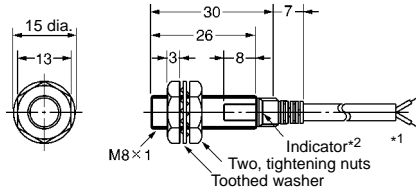

*1: Vinyl-insulated round cable (2 cores/3 cores), 4 dia. (60/0.08 dia.)
Standard length: 2 m
Cable length (in single metal conduit): 200 m max.

*2: Operation indicator: yellow


E2EM-X4□□

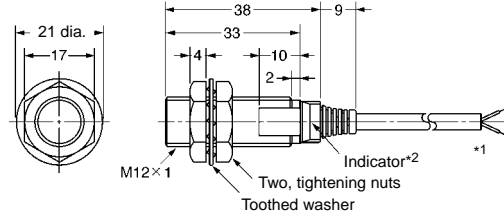

*1: Vinyl-insulated round cable (2 cores/3 cores), 4 dia.
Conductor cross-section: 0.3 mm²/insulator diameter: 1.3 mm
Standard length: 2 m

*2: X1 models: Operation indicator: red, set indicator: green
X2 models: Operation indicator: red
B/C models: Operation indicator: yellow


E2EM-X8□□

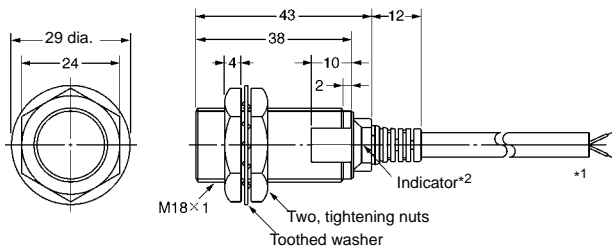

*1: Vinyl-insulated round cable (2 cores/3 cores), 6 dia.
Conductor cross-section: 0.5 mm²/insulator diameter: 1.9 mm
Standard length: 2 m

*2: X1 models: Operation indicator: red, set indicator: green
X2 models: Operation indicator: red
B/C models: Operation indicator: yellow


E2EM-X15□□

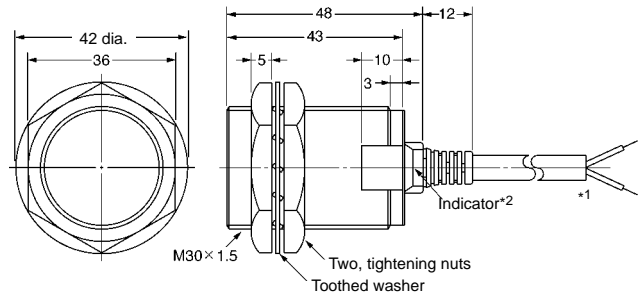

*1: Vinyl-insulated round cable (2 cores/3 cores), 6 dia.
Conductor cross-section: 0.5 mm²/insulator diameter: 1.9 mm
Standard length: 2 m

*2: X1 models: Operation indicator: red, set indicator: green
X2 models: Operation indicator: red
B/C models: Operation indicator: yellow

When Proximity Sensor is Connected to Sensor I/O Connector

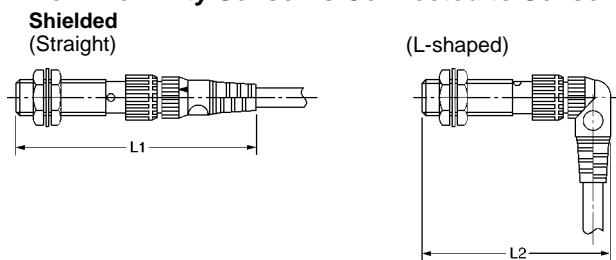


Dimensions when connected to XS2F (unit: mm)

Sensor diameter		L1	L2
M8		Approx. 75	Approx. 62
M12	DC	Approx. 80	Approx. 67
	AC	Approx. 85	Approx. 72
M18		Approx. 85	Approx. 72
M30		Approx. 90	Approx. 77

Accessories (Order Separately)

Mounting Brackets

Four kinds of resin mounting brackets are available. Choose an appropriate one depending on external dimensions

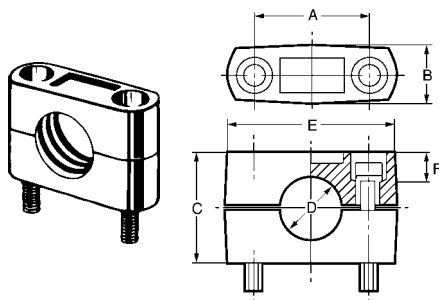

Model	Dimensions (mm)						Hexagonal bolts	Applicable Sensor outer diameter
	A	B	C	D	E	F		
Y92E-B8	18±0.2	10 max.	18	8 dia.	28 max.	6	M4 x 20	M8
Y92E-B12	24±0.2	12.5 max.	20	12 dia.	37 max.	6	M4 x 25	M12
Y92E-B18	32±0.2	17 max.	30	18 dia.	47 max.	7	M5 x 32	M18
Y92E-B30	45±0.2	17 max.	50	30 dia.	60 max.	10	M5 x 50	M30

Note: When using the Mounting Brackets for unshielded models, pay attention to the influence of surrounding metals. (For dimensions of Sensors, refer to the dimensions shown for each model.)

Installation

Connection with Sensor I/O Connectors

Proximity Sensors			Sensor I/O Connectors	Connection
Type	Operation	Model		
DC 3-wire	NO	E2EM-X□C1-M1	1: Straight 2: L-shaped XS2F-D42□-□C0-A D: 2-m cable G: 5-m cable	
		E2EM-X□C2-M1	1: Straight 2: L-shaped XS2F-D42□-□80-A D: 2-m cable G: 5-m cable	
	NC	E2EM-X□C2-M1	1: Straight 2: L-shaped XS2F-D42□-□80-A D: 2-m cable G: 5-m cable	

Note: For details, refer to the *Sensor I/O Connectors Catalog (G010)*.

Precautions

!
WARNING

This product is not designed or rated for ensuring safety of persons. Do not use it for such purposes.

■ Precautions for Safe Use

Power Supply

Do not impose an excessive voltage on the E2EM, otherwise it may be damaged. Do not impose AC current (100 VAC) on any E2EM DC model, otherwise it may be damaged.

Load Short-circuit

Do not short-circuit the load, or the E2EM may be damaged.

The E2EM's short-circuit protection function will be valid if the polarity of the supply voltage imposed is correct and within the rated voltage range.

Wiring

Be sure to wire the E2EM and load correctly, otherwise it may be damaged.

Connection with No Load

Be sure to insert loads when wiring. Make sure to connect a proper load to the E2EM in operation, otherwise it may damage internal elements.

Do not expose the product to flammable or explosive gases.

Do not disassemble, repair, or modify the product.

■ Precautions for Correct Use


Designing

Power Reset Time

The Proximity Sensor is ready to operate within 100 ms after power is supplied. If power supplies are connected to the Proximity Sensor and load respectively, be sure to supply power to the Proximity Sensor before supplying power to the load.

Effects of Surrounding Metal

When mounting the E2EM within a metal panel, ensure that the clearances given in the following table are maintained.

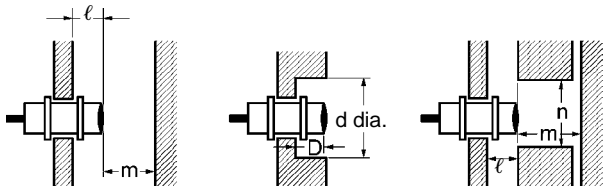

(Unit: mm)

Type		Item	M8	M12	M18	M30
E2EM-X□X□ DC 2-wire	Shielded	ℓ	---	2.4	3.6	6
		d	---	18	27	45
		D	---	2.4	3.6	6
		m	---	12	24	45
		n	---	18	27	45
	Unshielded	ℓ	---	---	25	45
		d	---	---	70	120
		D	---	---	25	45
		m	---	---	48	90
		n	---	---	70	120
E2EM-X□B□/C□ DC 3-wire	Shielded	ℓ	0	2.4	3.6	6
		d	8	18	27	45
		D	0	2.4	3.6	6
		m	4.5	12	24	45
		n	12	18	27	45

Power OFF

The Proximity Sensor may output a pulse signal when it is turned OFF. Therefore, it is recommended that the load be turned OFF before turning OFF the Proximity Sensor.

Power Supply Transformer


When using a DC power supply, make sure that the DC power supply has an insulated transformer. Do not use a DC power supply with an auto-transformer.

AND/OR Connection

When using the product in an AND/OR circuit, the product may not function properly due to incorrect pulses or leakage currents. Therefore, confirm that no problems will occur before actually using the product in such a circuit.

Mutual Interference

When installing two or more Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.

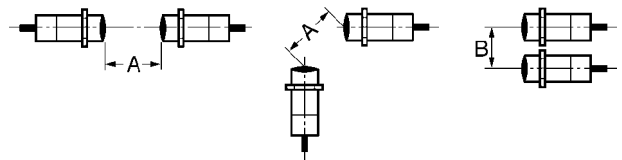

(Unit: mm)

Type	Item	M8	M12	M18	M30	
E2EM-X□X□ DC 2-wire	Shielded	A	---	30	60	110
		B	---	20	35	90
	Unshielded	A	---	---	200	350
		B	---	---	120	300
E2EM-X□B□/C□ DC 3-wire	Shielded	A	20	30	60	110
	B	15	20	35	90	

Designing

Confirmation of Connection between DC 2-wire Proximity Sensor and Programmable Controller

Connection conditions are determined from the relationship between the input ON voltage and OFF voltage of the PC and the output residual voltage and leakage current of the Proximity Sensor.

Connection Conditions

- Relationship between the ON voltage of the PC and the residual voltage of the Proximity Sensor must be as follows:

$$V_{on} \leq V_{cc} - V_R$$

V_{on} : ON voltage of the PC

V_{cc} : Supply voltage

V_R : Output residual voltage the Proximity Sensor

- Relationship between the OFF voltage of the PC and the leakage current of the Proximity Sensor must be as follows:

$$V_{off} \geq I_{leak} \times R_{in}$$

V_{off} : OFF voltage of the PC

I_{leak} : Leakage current of the Proximity Sensor

R_{in} : Input impedance of the PC

Connection is possible under the following conditions.

Example values on the PC side

ON voltage: 10.2 V min.

OFF voltage: 3 V max.

Input impedance: 3.5 k Ω

Example values on the Proximity Sensor side

Output residual voltage: 5 V max.

Leakage current: 0.8 mA max.

If these values are put in the above formula, V_{on} and V_{off} will be as follows:

$$V_{on}: 10.2 \text{ V} < 24 \text{ V} - 5 \text{ V} (=19 \text{ V})$$

$$V_{off}: 3 \text{ V} > 0.8 \text{ mA} \times 3.5 \text{ k}\Omega (=2.8 \text{ V})$$

Wiring

High-tension Lines


Wiring through Metal Conduit:

If there is a power or high-tension line near the cable of the Proximity Sensor, wire the cable through an independent metal conduit to prevent against Proximity Sensor damage or malfunctioning.

Connections

DC 2-wire Models

Connection to relay load

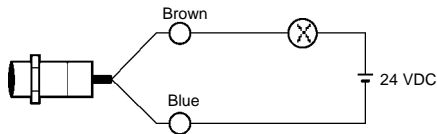


Note: The residual voltage of the DC 2-wire model is 5 V. Check the operating voltage of the relay.

DC 3-wire Models

Connection to S3D2 Sensor Controller

Operation can be reversed by selecting the signal input selector of the S3D2.

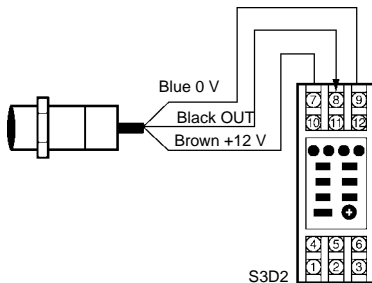

Cable Extension


Standard cable length is less than 200 m.

The tractive force is 50 N.

Mounting

The Proximity Sensor must not be subjected to excessive shock with a hammer when it is installed, otherwise the Proximity Sensor may be damaged or lose its water-resistivity.

Do not tighten the nut with excessive force. A washer must be used with the nut.

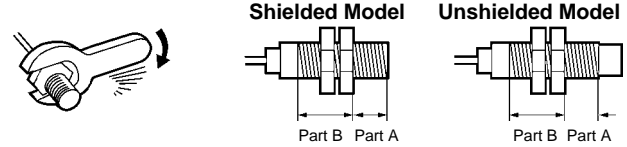

Note: The table below shows the tightening torques for part A and part B nuts. In the previous examples, the nut is on the sensor head side (part B) and hence the tightening torque for part B applies. If this nut is in part A, the tightening torque for part A applies instead.

Type		Part A		Part B
		Length	Torque	Torque
M8	Shielded	9 mm	9 N • m	12 N • m
M12		30 N • m		
M18		70 N • m		
M30		180 N • m		

Maintenance and Inspection

Periodically perform the following checks to ensure stable operation of the Proximity Sensor over a long period of time.

- Check for mounting position, dislocation, looseness, or distortion of the Proximity Sensor and sensing objects.
- Check for loose wiring and connections, improper contacts, and line breakage.
- Check for attachment or accumulation of metal powder or dust.
- Check for abnormal temperature conditions and other environmental conditions.
- Check for proper lighting of indicators (for models with a set indicator.)

Never disassemble or repair the Sensor.

Environment

Water Resistivity

Do not use the Proximity Sensor underwater, outdoors, or in the rain.

Operating Environment

Be sure to use the Proximity Sensor within its operating ambient temperature range and do not use the Proximity Sensor outdoors so that its reliability and life expectancy can be maintained. Although the Proximity Sensor is water resistive, a cover to protect the Proximity Sensor from water or water-soluble machining oil is recommended so that its reliability and life expectancy can be maintained.

Do not use the Proximity Sensor in an environment with chemical gas (e.g., strong alkaline or acid gasses including nitric, chromic, and concentrated sulfuric acid gasses).

Connecting Load to DC 2-wire Sensor

Refer to the following before using DC 2-wire Proximity Sensors.

Surge Protection


Although the Proximity Sensor has a surge absorption circuit, if there is any machine that has a large surge current (e.g., a motor or welding machine) near the Proximity Sensor, connect a surge suppressor to the machine.

Leakage Current

When the Proximity Sensor is OFF, the Proximity Sensor has leakage current. In this case, the load is imposed with a small voltage and the load may not be reset. Before using the Proximity Sensor, make sure that this voltage is less than the load reset voltage.

Countermeasures Against Leakage Current

Connect a bleeder resistor as the bypass for the leakage current so that the current flowing into the load will be less than the load reset current.

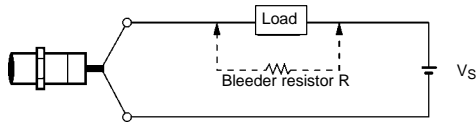

Refer to the following to calculate the bleeder resistance and the allowable power of the bleeder resistor.

$$R \cong V_S / (i_R - i_{OFF}) \text{ (k}\Omega\text{)}$$

$$P > V_S^2 / R \text{ (mW)}$$

P: The allowable power of the bleeder resistor. (The actual power capacity of the bleeder resistor must be at least a few times larger than the allowable power of the bleeder resistor.)

i_R : Leakage current of the Proximity Sensor (mA)

i_{OFF} : Load reset current (mA)

It is recommended that 15 k Ω max./450 mW min. for 12 VDC and 30 k Ω max./0.1 W min. for 24 VDC be used.

Inrush Current

A load that has a large inrush current (e.g., a lamp or motor) will damage the Proximity Sensor, in which case connect the load to the Proximity Sensor through a relay.

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

SUITABILITY FOR USE

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PERFORMANCE DATA

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. D090-E1-02

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

Sensing Devices Division H.Q.
Industrial Sensors Division
Shiokoji Horikawa, Shimogyo-ku,
Kyoto, 600-8530 Japan
Tel: (81)75-344-7022/Fax: (81)75-344-7107



Ph: 03 5278 8222 Fax: 03 5278 9761
65 Douro Street, North Geelong VIC 3215
www.factorycontrols.com.au

Printed in Japan
0805-0.1M (0997) (M)