

Q SERIES HEAVY DUTY FLOAT SWITCH

FEATURES

- Extra strong Polypropylene float
- S.P.D.T three wire switch
- No mercury on lead components
- High quality CPE rubber cable
- No corrodible metal parts
- Sealed tamper proof design
- Highly chemical resistant
- Wide range of cable sizes available

CABLE DATA

The switch is made of high grade polypropylene. Our high tech manufacturing process produces a sealed, seamless and glandless float that is totally tamper proof and extremely tough. The specially manufactured heavy duty cable fitted to the Q series switch is constructed from CPE Rubber, which is specifically designed for permanent immersion in water. The switch and cable are also resistant to oil, grease, fat, sewerage and a variety of chemicals.

APPLICATIONS

- High and low level control
- Loss of prime protection for pumps
- Automatic control of sump pumps
- Control of tank filling and draining valves
- Control of levels in effluent & separation pits
- Level control in bulk liquid tanks
- Control of level warning equipment



The Q Series Float Switch consists of a heavy duty polypropylene float double moulded onto a high quality three core cable. The float contains a single pole double throw switch, which can be used to give adjustable control over the level of liquid in tanks, pits and dams. By careful tethering of the cable the switch can be set to give an ON or Off action at any desired position. The heavy duty switch can directly control small pump motors, and is also ideal for instrument or PLC signalling.

QSERIES

OPERATING ENVIRONMENT

Maximum submergence	30 Meters, 300 Kpa Static Pressure
Maximum liquid temperature	60°C
Minimum liquid temperature	-20°C
Liquid specific gravity	>0.82
Liquid Ph	1 to 14
Smallest diameter well that the switch can operate in	600 mm
Liquid level change for the switch to operate	300 mm (approximately)
Smallest opening through which the switch will fit	108 mm
Minimum distance between float and closest tethering point/cable weight	100 mm (See typical application)
Suitability for use in sodium hypochlorite	Fully compatible
Suitability for use in sea water	Fully compatible
Suitability for use in potable water	Fully compatible

SWITCH DATA

Switch type	Single pole double throw
Contact type	1 mm
Contact material	Silver Alloy
Contact resistance	15 m ohms Max
Rated voltage AC	0 - 240V AC
Rated voltage DC	0 - 250V DC
Current rating resistive AC	21 A at 250V
Motor load current rating AC	4 A at 250V
Current rating resistive DC	0.05 A at 250V
Maximum lamp load AC	3A at 250V
Maximum operating frequency, electrical	60 operations per minute
Insulation resistive	100 Mega Ohms min (At 500V DC)
Dielectric strength between contacts	2000 VAC, 50/60 Hz for 1 minimum
Life expectancy mechanical	50,000,000 operations minimum
Life expectancy electrical	100,000 operations minimum
Approved standards	UL508 E41515 CSA C22.2 No.55 (File No LR21642)


IMPORTANT SAFETY NOTE

The Q Series Switches have been designed and built to be as tough as possible, and can withstand harsh environments. Great care should be taken to ensure the switch is only installed in positions where it will not be subjected to entanglement, severe agitation and abrasion against tank walls or moving equipment. If the application requires control of mains voltage, local electrical codes may require the switch to be isolated to a low voltage supply. This may be required, regardless of the high voltage rating of the float switch. Please check with your local electrical authority before connecting a Q Series Float Switch to a mains voltage supply.


CABLE DATA

Cable type	Heavy duty EPR / CPE
Outer sheathing	CPE
Inner sheathing	R-EP-90
Cores	3 Cores, each 1 mm Sq Copper
Cable diameter	9 mm nominal
Core colours	Blue (Common) Black (Normally Closed) Brown (Normally Open)
Cable voltage rating Uo/U	600V / 1Kv
AC Test voltage	2.5 Kv
Cable current carrying capacity	18 Amps Continuous at a temperature of 30.5°C
Cable maximum tensile strength	15 N/mm ²
Minimum bend radii	50 mm
Maximum ambient operating temperature	80°C
Minimum permissible ambient temperature	-40°C
Minimum permissible ambient temperature for fully flexible operation	-25°C
Cable maximum permissible short circuit temperature	250°C
Standard of construction	CNELEC HD 22.4 S4 & VDE0282-4/2005
Cable lengths available	4, 6, 10, 15, 20, 30, 50 Metres

TYPICAL APPLICATION

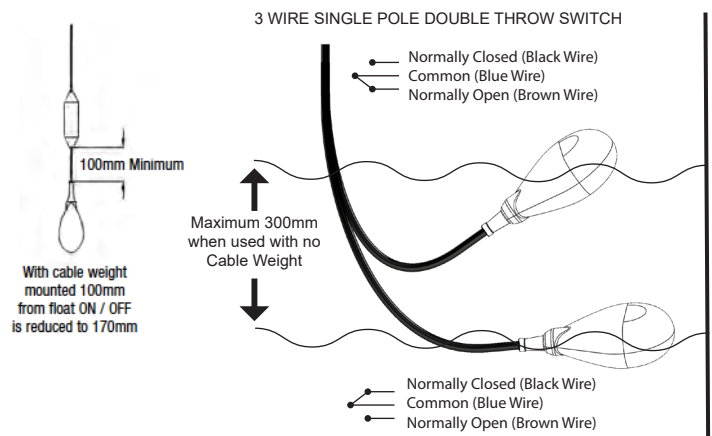

DIMENSIONS

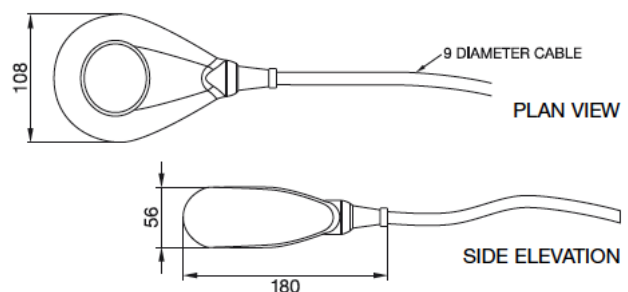

KELCO Engineering Pty Ltd

ABN 20 002 834 844 Head office and factory: 9/9 Powells Road Brookvale NSW 2100 Australia. Postal Address: PO Box 7485 Warringah Mall Post Shop Brookvale NSW 2100 Australia. Phone: +61 2 9905 6425 Fax: +61 2 9905 6420 Email: Sales@kelco.com.au Web: www.Kelco.com.au

PLEASE NOTE: Kelco Engineering Pty Ltd reserves the right to change the specification of this product without notice. Kelco Engineering Pty Ltd accepts no liability for personal injury or economic loss as a consequence of the use of this product. All rights reserved copyright Kelco Engineering Pty Ltd © 2016 The Kelco Q Series Float Switch is protected by a 12 month return to base warranty. Full details of our warranty can be downloaded from: <http://www.kelco.com.au/warranty>

PROUDLY DISTRIBUTED BY

FACTORY CONTROLS
03 5278 8222
sales@factorycontrols.com.au
www.factorycontrols.com.au
65 Downs Street, North Geelong Victoria 3215